

Licata Acrylic Brick Slips



Licata Acrylic Brick Slips



Inspiration

Licata Acrylic Brick Slips have been used to finish interior and exterior walls. Many millions of square metres of facade have been finished using brick slips. Brick slips are for facade cladding in both technical and aesthetic sense. When brick slips are used in new builds or renovation projects, they are given a masonry look that cannot be distinguished from traditional brickwork. This means that the authentic value of buildings and neighbourhoods is retained.

It is also possible to create a modern or contemporary ambiance using Acrylic Brick slips.

Acrylic Brick slips can be applied on different surfaces, such as: insulation systems, concrete and stony surfaces, stucco layers and various types of board. Please contact us to ask about the possibilities.

Products

Licata Acrylic brick slips are available in several different colours, sizes and textures. They come in hand formed and extruded versions. The extruded brick slip is the most streamlined. The Acrylic Brick slip is designed specially for the professional user. In-addition to the straight brick slip, an accompanying corner strip is also available. The special adhesive, which also indicated the colour of the steam, is available in several different colours.

It is possible to request a project brick slip. Acrylic Brick slips is able to create a faithful reproduction of existing bricks. Countless projects have been executed using project brick slips. Please contact us to ask about the possibilities.

European Leaders - Licata Building Systems



Licata Building Systems history dates back to the late sixties in Switzerland, where over the years the company has gained extensive experience in coating, insulation systems, powdery products. We have become one of the market leaders in Europe for our high quality of products, the product knowledge and for its first class customer service. With our efficient widespread transport network we can deliver fast and meet the needs of the most demanding clients.

The company prides itself on providing retailers, enterprises, users and technical staff with its own know-how and technical expertise in order to ensure correct application of the products and to provide effective solutions to every problem. Specifically, we provide telephone support, home care and perform inspections on construction sites to advise about the application of its products.



Licata Building Systems offer a full range of solutions both in paste and in powder, such as external thermal insulation composite systems (ETICS), decorative systems, coatings, water-based paint, plaster, mortar, adhesives, waterproofing and products for recovery and restoration.

Features and Benefits



Licata Acrylic Brick slips are almost totally mineral based. The product consists mainly of a mixture of assorted quartz sands and a binding agent. The binding agent is a high-grade polymer dispersion and serves the role of clay in a traditional brick. It means that the product remains flexible.

The UV-resistant colour pigments guarantee the colour fastness of the brick slip. The brick slip and the adhesive consist mainly of the same raw materials and, following application, form one whole.

Thanks to the combination of high-quality raw materials and specific production processes, the Acrylic brick slip is a unique and durable product. Brick slips cannot be distinguished from traditional bricks, but they do have many advantages. If it is not technically possible to use bricks, Acrylic brick slips provide a way of creating a masonry look after all.

The advantages definitely also apply in the long term. Over 30 years experience proves that brick slips are more or less maintenance free. Furthermore, brick slips are washable, impact resistant, paintable, water repellent and vapour permeable.

Partly for this reason, **Licata Building Systems** is able to guarantee the product for **10 years**.



Benefits

- + Very long life, with 10 year product guarantee
- + Low thickness and weight
- + Resistant to all weather conditions
- + Washable, impact resistant, paintable
- + Colourfast and no efflorescence
- + British standard brick dimensions
- + Offer a professional, real brick finish




Colour Guide

Apart from the standard brick slip colours below, Licata Building Systems can offer special colour shades to help you achieve your desired design, or to match with existing bricks shades.

***Please contact us for further information**



LIC6000 A

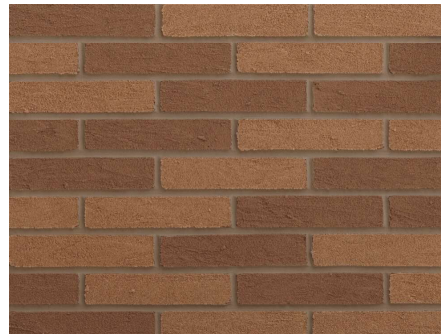


LIC6001 A




LIC6002 A




LIC6003 A

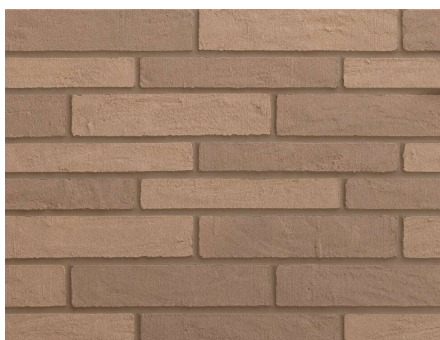


LIC6004 B

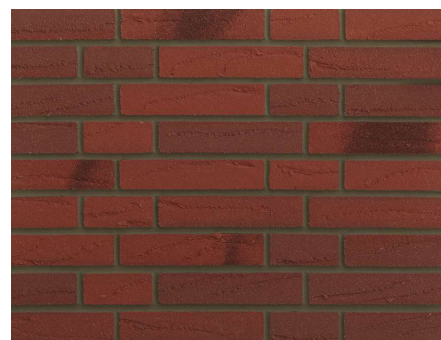

LIC6005 A

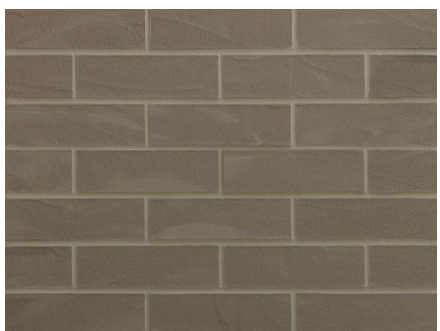


LIC6006 A

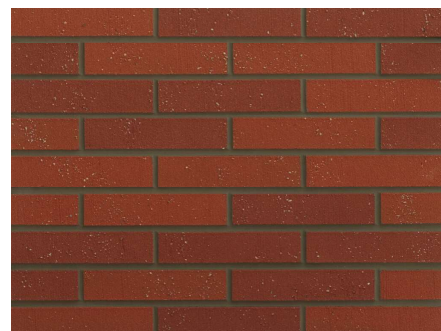


LIC6007 A


Colour Guide

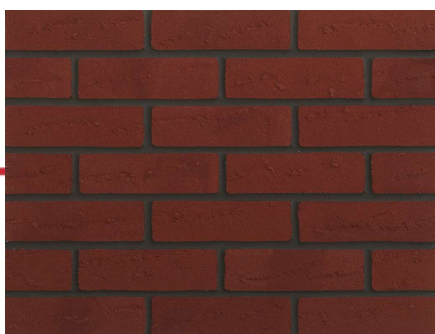


LIC6008 A

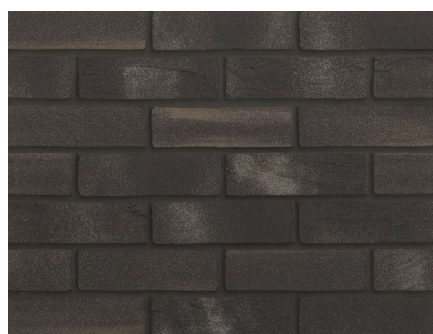


LIC6009 A

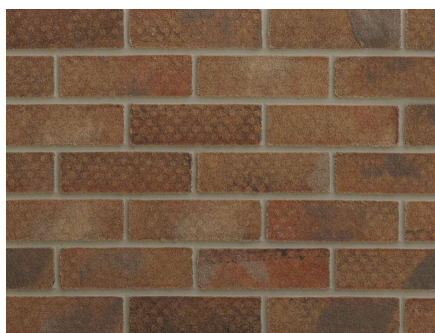


LIC6010 C

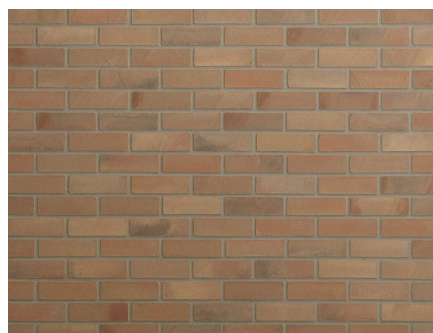


LIC6011 C

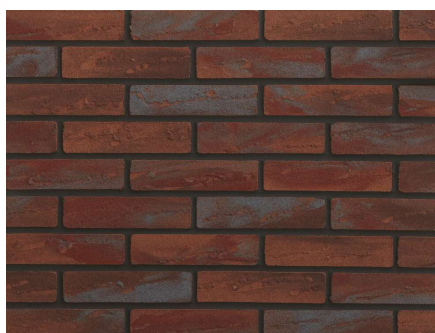


LIC6012 C

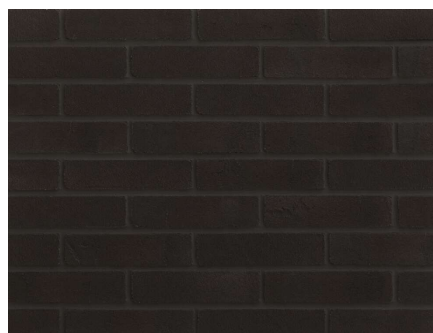

LIC6013 A

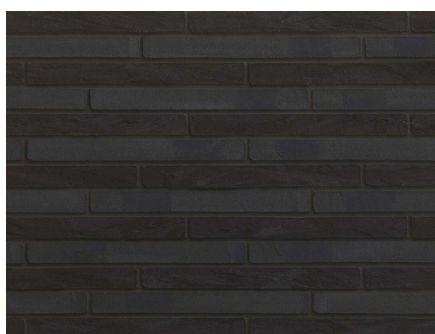

LIC6014 B

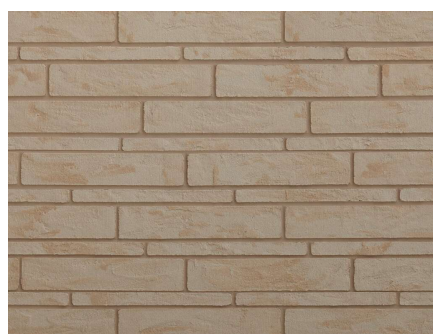


LIC6015 B


Colour Guide




LIC6016 B

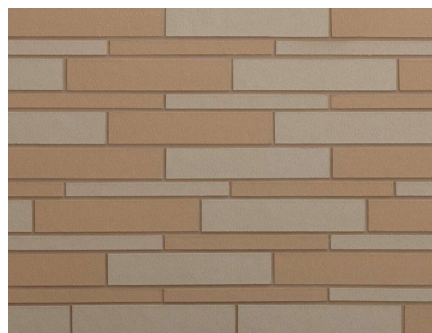


LIC6017 B

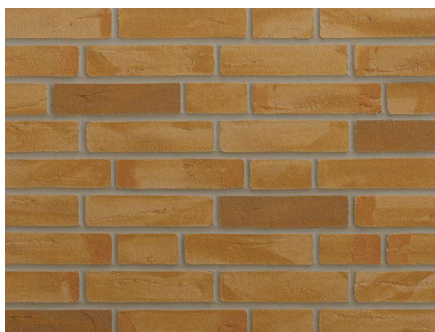


LIC6018 C

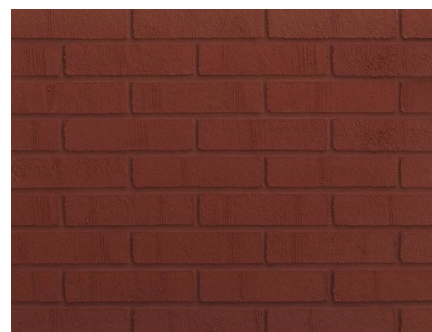


LIC6019 A

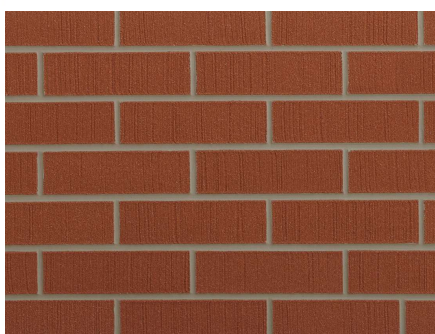

LIC6020 A

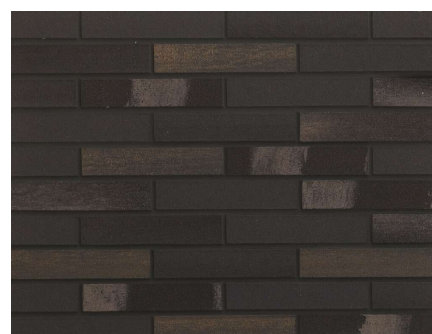

LIC6021 C

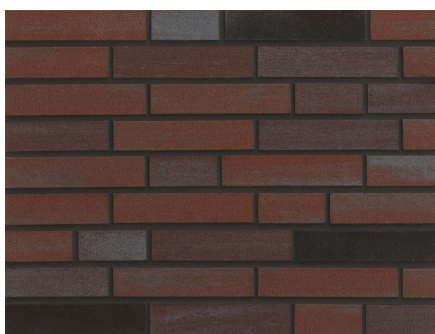


LIC6022 B




LIC6023 B


Colour Guide

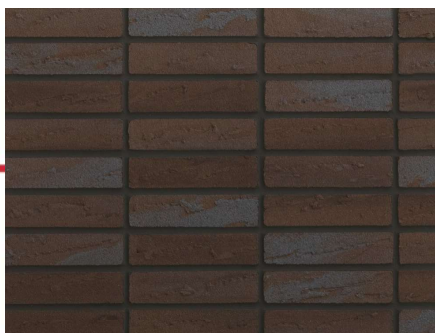


LIC6024 B

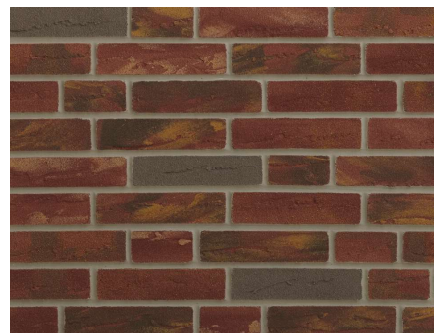


LIC6025 C

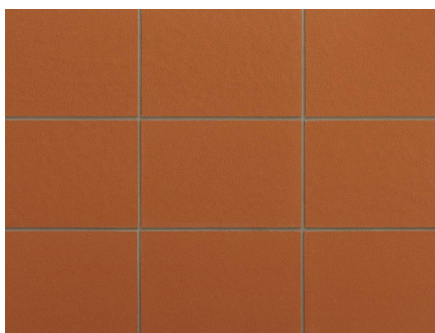

LIC6026 D

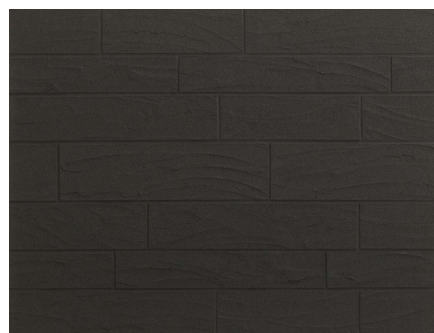


LIC6027 C

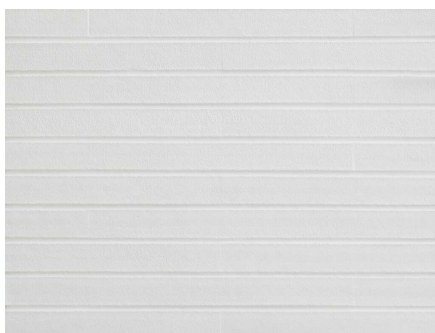


LIC6028 B



LIC6029 C

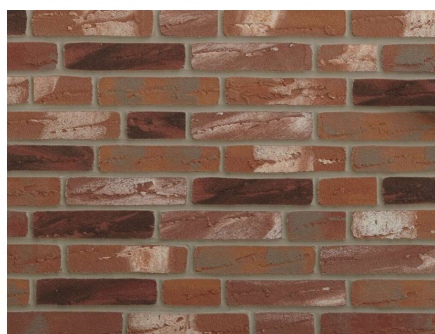


LIC6030 C

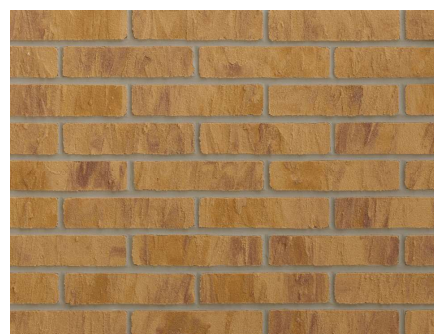


LIC6031 B


Colour Guide

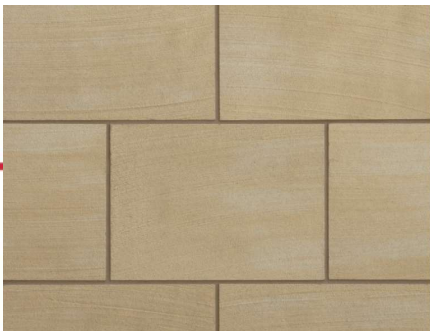

LIC6032 D

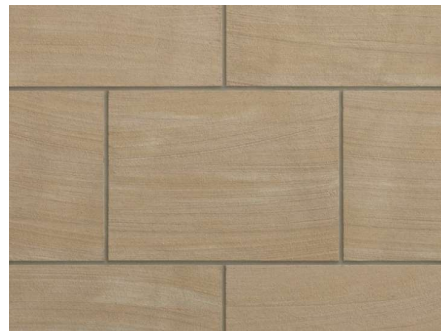

LIC6033 D

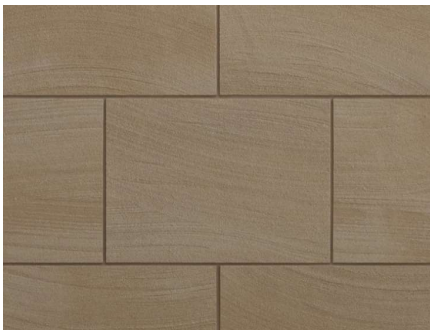


LIC6034 D

Licata Acrylic Brick Slip System

Acrylic Brick slips can be used in conjunction with a Licata Therm External Wall Insulation System on block work/brickwork or steel framed systems.

- + Full system beads
- + Insulation boards
- + Fixings
- + Reinforcing coat
- + Acrylic Brick slips and pointing mortar

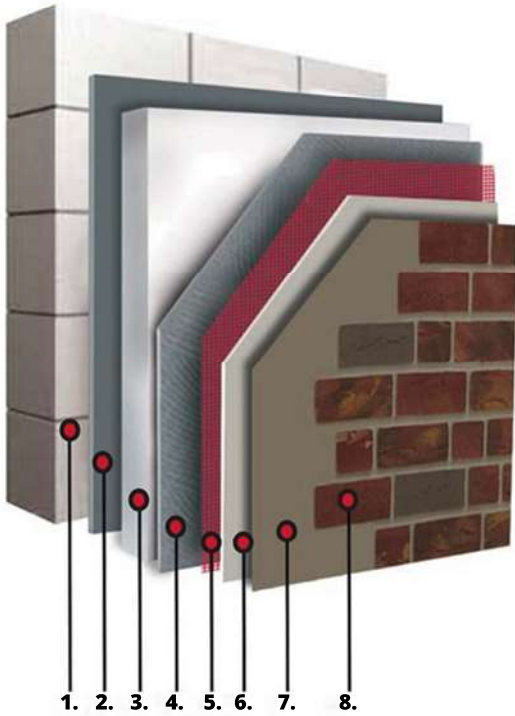

1. Blockwork/ Brickwork or steel framed systems
2. Adhesive system. Acril Primer Plus, to substrate to ensure correct adhesion
3. Insulation Boards achieve insulation values to meet or exceed, stringent requirements of Part 'L' of the building regulations.
4. Fire Barriers to comply with the recommendations of the BRE, horizontal barriers are required to be placed at every floor level above 2 storeys. These barriers comprise of 1200mm x 200mm rock fibre panels, density 140kg/m³. The strip is adhered to the substrate in a continuous strip around the building.
5. Reinforcing Coat Raso Plus - a dry adhesive hydraulic and polymer binder, modifying additives and fine grain fillers, vapour permeable. Range of working temperatures from +5 to +30°C. Mixed with around 6.5 litres of clean water per 25kg bag.
6. Reinforcements shall be our fibreglass mesh with a surface treatment coating to provide a high resistance to alkali attack and is manufactured so as to prevent laminar movement and deformation.
7. Licata Acrylic Brick slips adhesive and joint mortar - cement-free mortar to apply Brick Slips.
8. Acrylic Brick slips to create the appearance of a classic brick finish

Licata Building Systems adhesive and joint mortar comes in five different shades to blend or add distinctive accents to buildings - allowing a wide variety of designs to be achieved.



LIC.0380



LIC.0864



LIC.0508



LIC.0381



LIC.0382

Application



1. The first step in correct application of Brick slips, is the careful setting out of the area to which they are to be applied.

2. After setting out the divisions, begin at the top. Brick adhesive and joint mortar horizontally with the 6mm x 6mm toothed trowel at the external corners.

3. Take care not to apply so much material that a skin can form whilst you work.

4. Then embed the corner pieces firmly in the mortar, ensuring that they are offset.

5. Apply Brick adhesive and joint mortar at the same height as the corner pieces to an area of approximately 1m².

MADE IN ITALY



LONDON BRANCH:

Unit 6 | Hampton Business Park | Bolney Way
Twickenham | London TW13 6DB
Tel: 020 8894 3372
info@licataltd.co.uk | www.licataltd.co.uk

DARTFORD BRANCH:

Unit 4 | Schooner Park | Schooner Court
Dartford | DA2 6NW
Tel: 013 2292 7600

To the best of our knowledge and belief, the information provided is true and accurate, however as conditions of use and any labour involved are beyond our control the user must satisfy themselves by prior testing that the product is suitable for their application. No responsibility can be accepted or any warranty given by our Representatives, Agents or Distributors. Products are sold subject to our Standard Conditions of Sale.